

TECHNICAL DATA SHEET

ECORATIO BETOPRO WX-G


Special Release Agent Wax for the Removal of Inserts

DESCRIPTION

Betopro WX-G (RB 10.65), manufactured by Ecoratio in The Netherlands, is an Environmentally Friendly Release Agent Wax that has been specially designed for the safe and easy removal of inserts used in the manufacture of precast concrete panels and components.

Inserts are often required in the production process. Removing them properly may be difficult. Betopro® WX-G ensures that inserts can be removed quickly and easily after demoulding of the precast product.

By replacing traditional products that are often flammable or harmful to the environment, WX-G reduces the risk of accidental fires and associated burns, and also keeps our environment clean and safe.

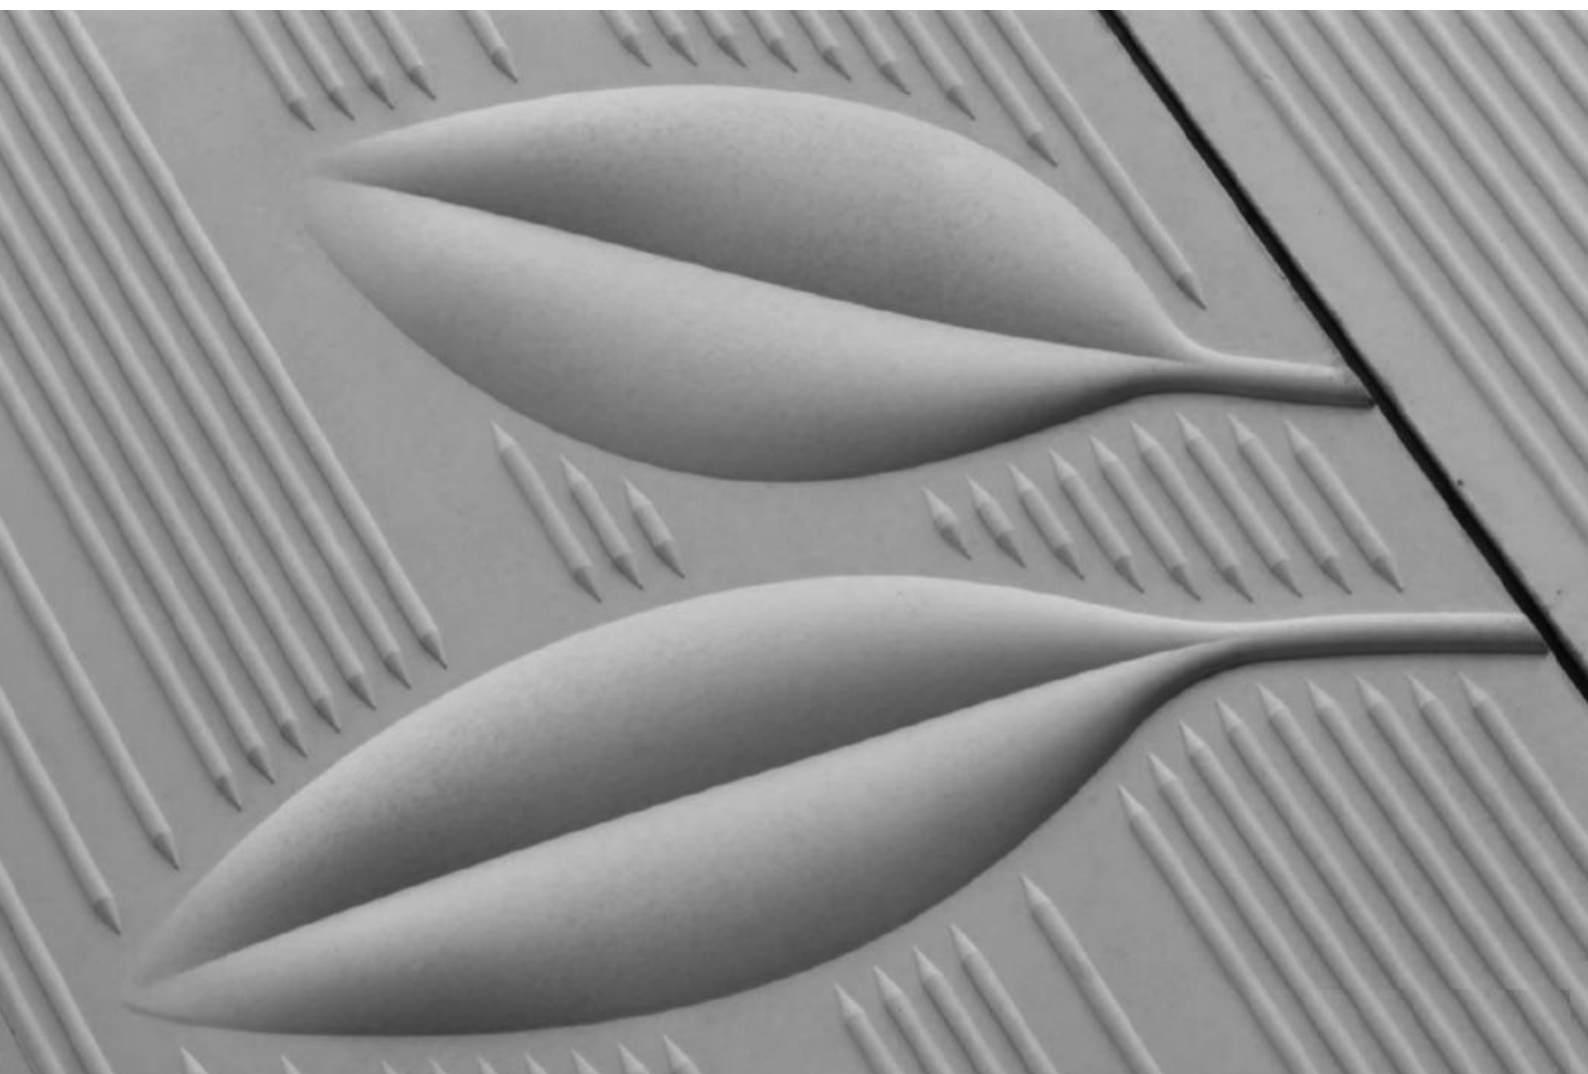



SPECIAL PROPERTIES

- Easy to apply, ready to use paste
- Solvent free
- Low odour
- Non-Flammable
- Can be used at temperatures from 0°C up to 35°C

PRODUCT BENEFITS

- Enables quick & easy removal of inserts
- Eliminates damage to the precast component & the mould when removing inserts
- Minimises cleaning as leaves virtually no residue in the mould
- Enable inserts (including polystyrene) to be reused multiple times.
- Creates uniform, void-free concrete surfaces
- Non-hazardous to health & the environment

USES

- For the safe and easy removal of inserts in precast concrete manufacture
- As a release agent for polystyrene inserts
- As a release agent for steel inserts
- As a release agent for timber inserts
- As a release agent on absorbent materials, e.g. cardboard

PACKAGING AND SIZE

Betopro WX-G (RB 10.65) is available in 20 Litre steel lock-seal containers.

APPLICATION PROCEDURE

Apply Betopro WX-G (RB 10.65) thinly and evenly to the insert/mould whilst ensuring a full coverage, using a brush or cloth. The mould/insert should be clean and dry in order to achieve the maximum effect provided by the wax film (Betopro® WX-G forms a continuous separation film on the mould).

QUANTITY USAGE

Application rates will vary depending on the material of the insert.

HEALTH AND SAFETY

Betopro® WX-G (RB 10.65) is non-hazardous to health & the environment.

It is good practice to wear gloves when using the product.

If product gets in eyes or mouth, wash out with clean water and obtain medical attention if any irritation occurs.

For further information read the Material Safety Data sheet.

TECHNICAL DATA

COLOUR:	Green waxed emulsion based on vegetable fats and oils.
CONDITION:	Solid Paste, ready to use.
SPECIFIC GRAVITY:	896 grams/litre
FLASH POINT:	N/A
TOXICITY:	Non- Toxic
SHELF LIFE:	At least 2 years after production date

TECHNICAL INFORMATION

Should you have any queries, or require further information, please contact our **Technical Sales Team: +64 4 568 5401**