


TECHNICAL DATA SHEET


PLASTRIP S

Maximum Concentration, low Viscosity Mould Release Oil

DESCRIPTION

Rockbond Plastrip S (RB 7.36) is a chemical release agent specially formulated to give easy release of plastic and thermoplastic mould liners, providing a high quality surface finish, but is suitable for all types of formwork. It is easily applied and may be applied to formwork immediately prior to casting without reducing the finished quality. It also offers corrosion protection to any metal surface.

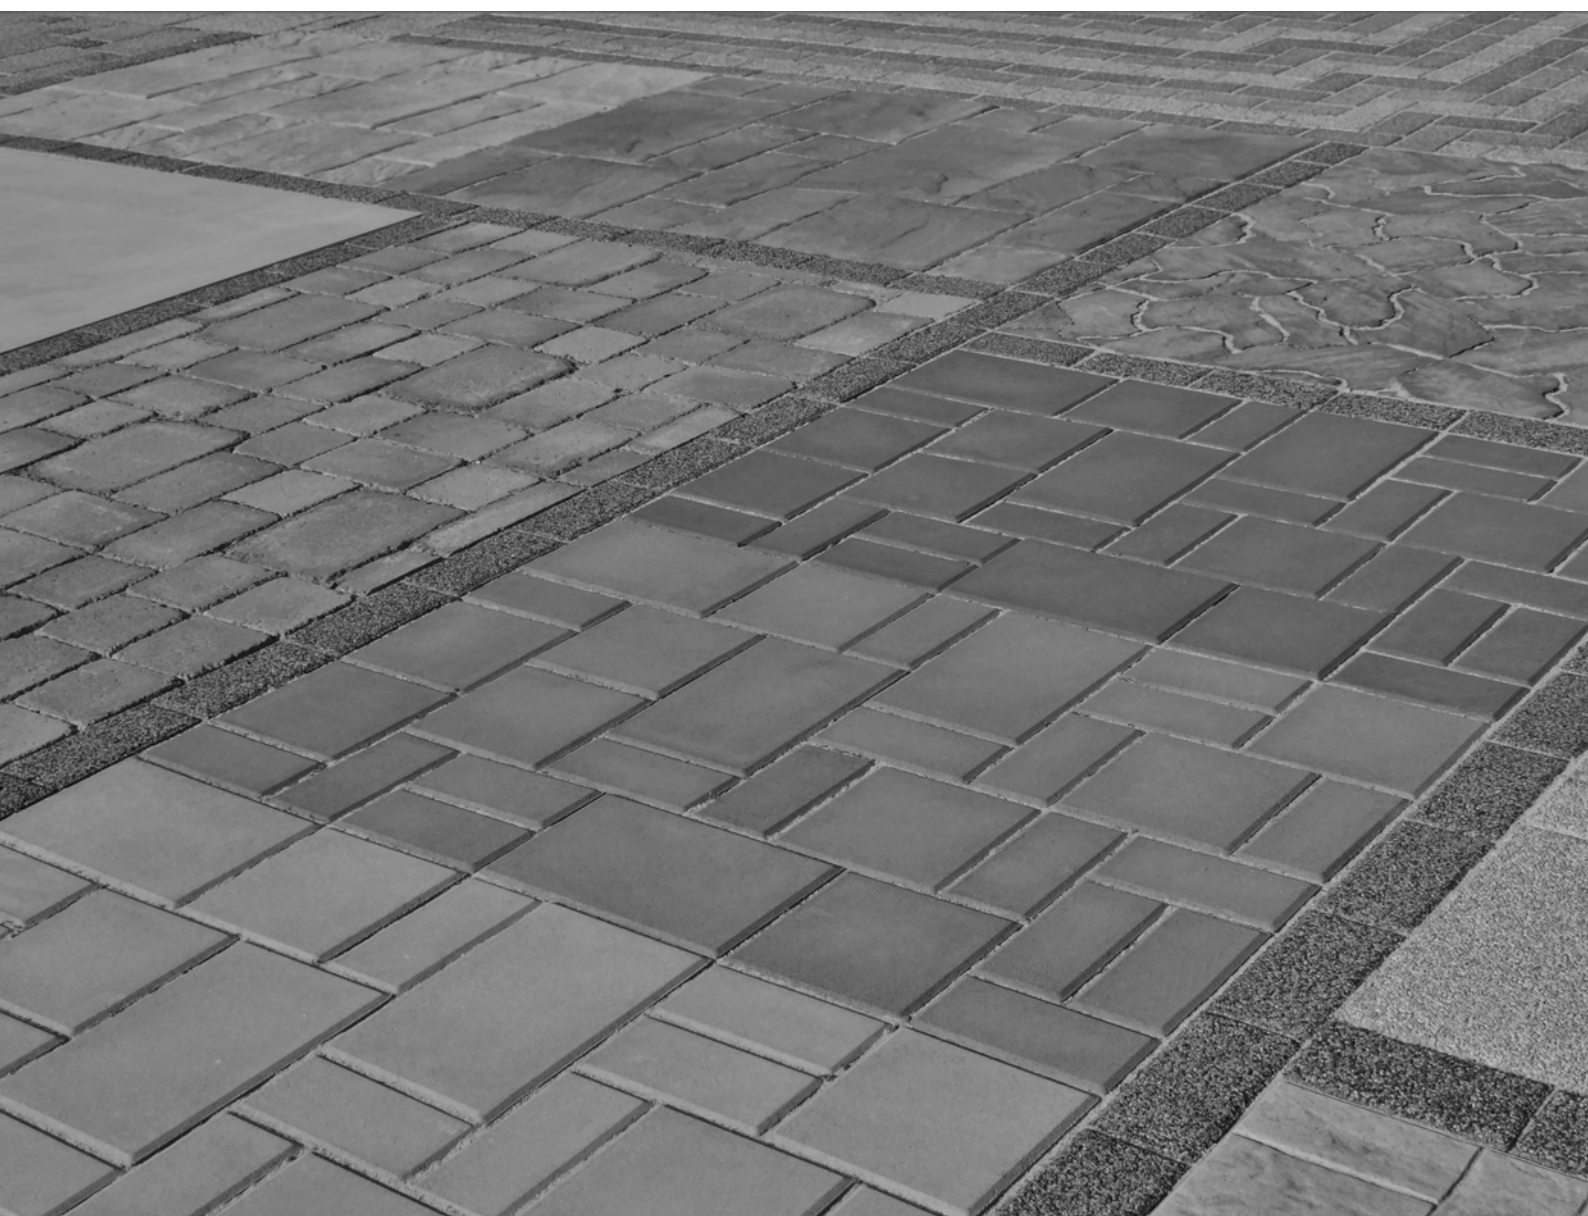

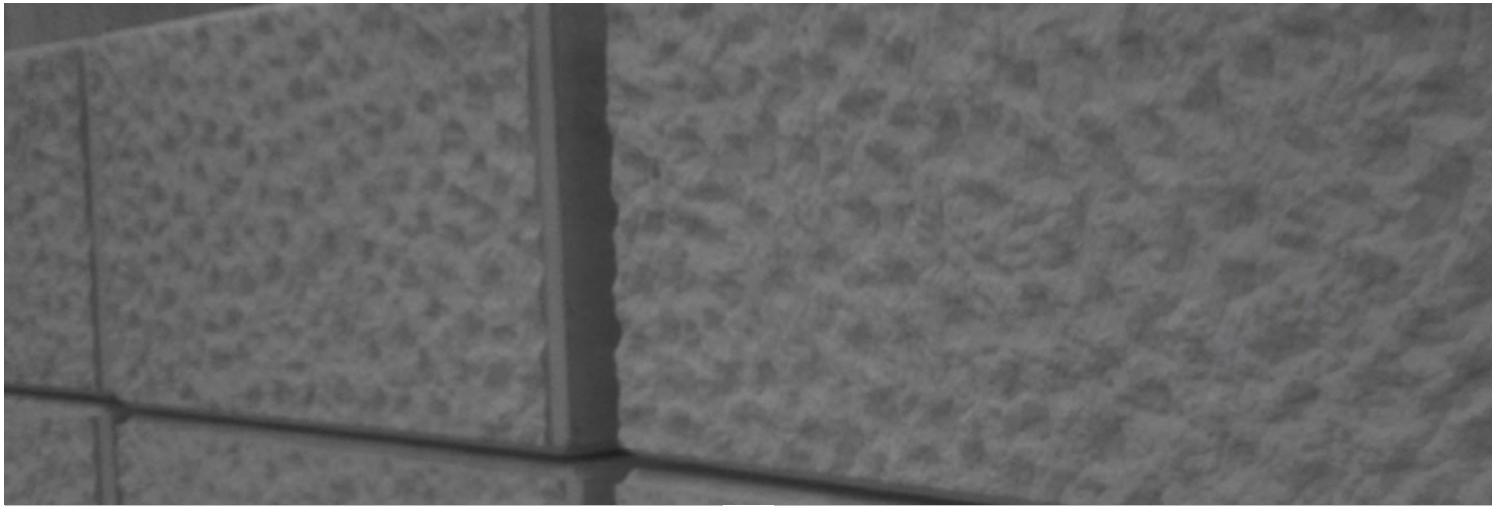

SPECIAL PROPERTIES

- Suitable for use on plastic mould liners with excellent results.
- Is a suspension and sediment free, highly mobile liquid, which can be used in very fine sprays without clogging the jets
- No unpleasant odour even when using a fine fog spray
- Very economic coverage rates can be obtained without difficulty.
- Retains its mobility at low temperatures.
- It may be applied immediately prior to casting, or treated forms may be left until apparently dry.
- Rockbond Plastrip S may be used for metal or timber mould boxes holding the mould liner, allowing easy cleaning of all equipment.
- Can be used with either grey or white cement or concretes incorporating pigments.
- Provides quick positive release of form-liners, reducing labour costs and damage to formwork and liners.
- Drastically reduces the incidence of blowholes, surface blemishes and staining.

APPLICATION

Rockbond Plastrip S is ready to use and should not be diluted. It should be applied as thinly and evenly as possible for optimum performance. It can be applied to all types of formwork and mould liners by spray, fine haired brush, swab or roller. Any excess should be mopped up. For the best and most economical performance application by fine fog spray is recommended. It will not clog fine jets even at freezing temperatures.

STORAGE + SHELF LIFE

Rockbond Plastrip S should be protected from frost and should be stored in well ventilated areas. Keep away from naked flames, electrical equipment, and food stuffs. In excess of 12 months in sealed containers

SPECIFICATIONS

Rockbond 7.36 Plastrips S mould release agent is manufactured for Rockbond SCP Ltd and should be applied strictly in accordance with the instructions on this sheet. For specific advice regarding any aspect of this product, please consult our Technical Department

COVERAGE

A recommended thin coating gives a coverage between 30 to 40m² per litre depending upon surface porosity. Care should be taken to ensure that RB 7.36 Plastrip S is applied as recommended as this will achieve optimum performance and maximum economy.

HEALTH AND SAFETY

Prolonged physical contact should be avoided and personal and environmental hygiene encouraged in common with the use of all mould release agents. Where contact with skin occurs, the material should be removed with soap and water. If splashes affect eyes, they should be bathed immediately with copious quantities of clean water and if discomfort persists medical attention should be sought without delay.

TECHNICAL INFORMATION

Should you have any queries, or require further information, please contact our **Technical Sales Team: +64 4 568 5401**